

L-SLK Series



Shur-Lok Access Doors

Doors are designed for drywall, masonry or concrete construction and provide the security required in today's schools, hospitals, hotels, and correctional institutions.

Door Panel are fabricated from 14 gauge, galvanized steel and the door is provided with a 16 gauge vertical reinforcement channel.

Frame is fabricated from 16 gauge, galvanized steel.

Lock is an automatic springbolt type featuring a precision mechanism. When the door is closed in the locked position, the uniquely designed angled cam lock automatically engages. The key can only be removed when the lock is in the locked position.

Hinge is a concealed continuous stainless steel piano hinge

Finish is a white prime coat suitable for painting.

Guide Specification

Provide Larsen's[®] L-SLK Series, Shur-Lok Access Doors (specify model number and options). Access door panel shall be fabricated from 14 gauge, galvanized steel with a white prime coat finish. Frame is fabricated from 16 gauge, galvanized steel with a white prime coat finish. Door shall have a 16 gauge vertical reinforcement channel, a concealed hinge, and an automatic locking, spring bolt lock. Finish shall be a white prime coat suitable for painting.



MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

L-SLK Shur-Lok Access Door

Suffix Options

-AS Automatic Spring Door Closer
 -SS Stainless Steel Construction
 (Type 304 No. 4 Satin Finish)



STANDARD AVAILABLE SIZES

Special sizes available upon request.

| NOMINAL DOOR SIZE (W X H) | WALL OPENING (minimum required) | KEY QTY | WEIGHT | -SDL (Extra Latches) |
|---------------------------|---------------------------------|---------|-----------|----------------------|
| L-SLK 8" x 8" | 8-1/2" x 8-1/2" | 1 | 4 lbs. | 0 |
| L-SLK 10" x 10" | 10-1/2" x 10-1/2" | 1 | 5.5 lbs. | 0 |
| L-SLK 12" x 12" | 12-1/2" x 12-1/2" | 1 | 7 lbs. | 0 |
| L-SLK 14" x 14" | 14-1/2" x 14-1/2" | 1 | 8 lbs. | 0 |
| L-SLK 16" x 16" | 16-1/2" x 16-1/2" | 1 | 10 lbs. | 0 |
| L-SLK 18" x 18" | 18-1/2" x 18-1/2" | 1 | 12 lbs. | 2 |
| L-SLK 18" x 24" | 18-1/2" x 24-1/2" | 1 | 16 lbs. | 4 |
| L-SLK 22" x 22" | 22-1/2" x 22-1/2" | 1 | 17.5 lbs. | 2 |
| L-SLK 24" x 24" | 24-1/2" x 24-1/2" | 1 | 20.5 lbs. | 2 |
| L-SLK 24" x 30" | 24-1/2" x 30-1/2" | 1 | 24 lbs. | 4 |
| L-SLK 24" x 36" | 24-1/2" x 36-1/2" | 1 | 28 lbs. | 6 |
| L-SLK 30" x 30" | 30-1/2" x 30-1/2" | 1 | 28.5 lbs. | 6 |
| L-SLK 36" x 36" | 36-1/2" x 36-1/2" | 1 | 41.5 lbs. | 8 |

Notes:

1. Concealed Hinge
2. Door
3. Reinforcement Channel
4. Spring Door Lock
5. SDL (Extra Latches) Big Doors Only

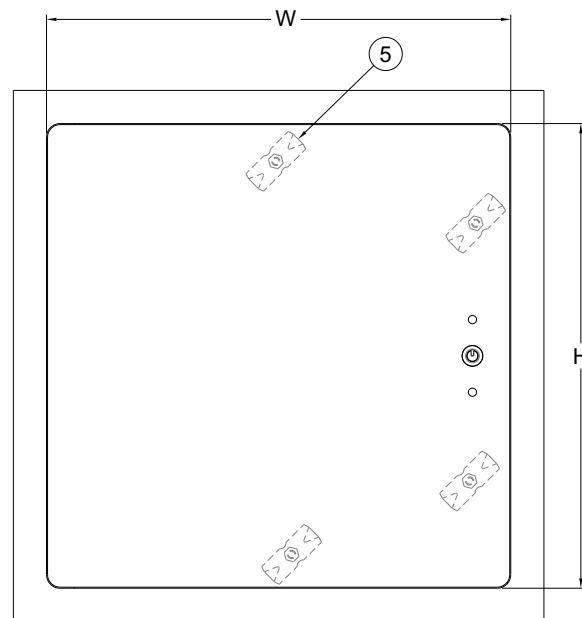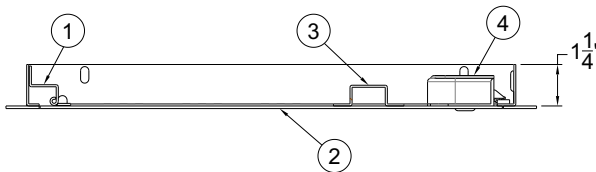

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Call Larsen's Manufacturing Co. for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Larsen's assumes no responsibility for use of void or superceded data. © Copyright Larsen's Manufacturing Co.®, Member of Morris Group International® Please visit www.larsensmfg.com for most current specifications.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____

L-SLK

Revised: 04/15/2019