

FRAMES & DOOR WORKSHEET

Customer Name	Date
Project	Quantity

To accurately measure for new frames, please follow steps 1-4 and fill in all blanks with appropriate measurements.

- 1. Open existing door as far as it will open.
- 2. Measure inside height (A) and width (B) where trim overlaps the tub.

Dimension A

Dimension **B**


Note: On measurement **B**, you must measure up to the hinge leaf.

3. How far does the existing trim project from the wall?

Dimension C

4. How wide is the existing trim face?

Dimension **D**

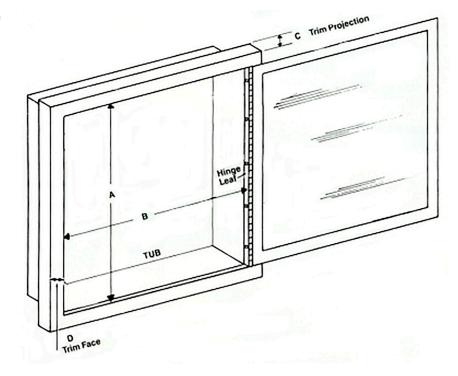


DOOR OPTIONS CIRCLE ONE














DOORS ARE GLAZED WITH 1/8" CLEAR ACRYLIC

* NOTE: Horizontal Duo and Larsen-Loc® will be hinged on right side unless otherwise specified.

SPECIFICATIONS

Formed aluminum frame and extruded aluminum hollow door 1/2" thick with clear satin anodized finish. Turn handle and matching aluminum hinge.

INSTALLATION

Remove existing door at hinge. New formed frame will fit over existing frame. Inside flange of formed frame can be mounted to inside of tub with sheet metal screws.